


TF14+ LCD

Cable temperature sensor

thermokon[®]
HOME OF SENSOR TECHNOLOGY

Datasheet

Subject to technical alteration
Issue date: 14.05.2024 • A140

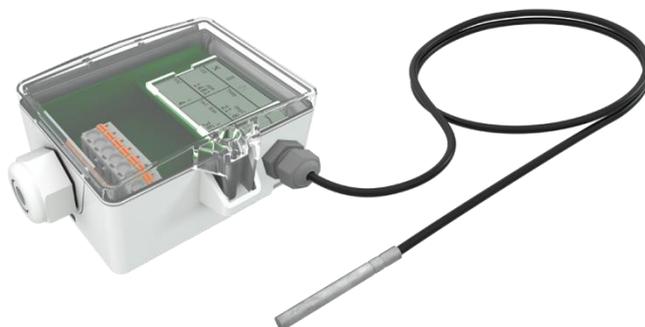

» APPLICATION

Cable sensor for temperature measurement in HVAC applications. In conjunction with a Thermowell pocket suitable for temperature measurement in duct applications. Designed for control and monitoring applications.

» TYPES AVAILABLE

Cable sensor with display temperature – active 0..10 V

- TF14+ LCD TRV MultiRange T160 050.06 L1000

Cable sensor with display temperature – active 4..20 mA

- TF14+ LCD TRA MultiRange T160 050.06 L1000

TF14+ LCD TRV:

Product designation

MultiRange:

Measuring range adjustable via USEapp

T160:

max. temperature 160 °C

050.06:

Pocket length. Diameter, optional mounting length 50 | 100 | 150 | 200 | 250 mm

L1000:

standard cable length 1000 mm, additional cable lengths on request

TF25+ TRV MultiRange T160 050.06 L1000

» PRODUCT TESTING AND CERTIFICATION



Declaration of conformity

The declaration of conformity of the products are available on our website
<https://www.thermokon.de/direct/en-gb/categories/tf14plus>

» NOTES ON DISPOSAL



The crossed-out wheeled bin symbol indicates that the product or removable batteries must not be disposed of with household or commercial waste. Within the EU, you are legally obliged to dispose of the product separately and appropriately in accordance with the national laws of your country. Alternatively, please contact your supplier or Thermokon Sensortechnik GmbH. Further information can be found at: www.thermokon.com

» SECURITY ADVICE – CAUTION



The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

» BUILD-UP OF SELF-HEATING BY ELECTRICAL DISSIPATIVE POWER

Sensors with electronic components always have a dissipative power, which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power has to be considered when measuring temperature. In case of a fixed operating voltage ($\pm 0,2$ V) this is normally done by adding or reducing a constant offset value.

Thermokon transducers can be operated with variable operating voltages. The transducers are set at the factory with a reference operating voltage of 24 V =.

At this voltage, the expected measuring error of the output signal will be the least. Other operating voltages, can cause a measurement deviation changing power loss of the sensor electronics.

A recalibration can be carried out directly on the unit or via a software variable (app or bus).

Remark: Occurring draught leads to a better carrying-off of dissipative power at the sensor. Thus temporally limited fluctuations might occur upon temperature measurement.


» TECHNICAL DATA

Measuring values	temperature		
Output voltage (type-dependent)	TRV 0..10 V or 0..5 V, configurable via jumper, min. load 10 k Ω (live-zero configuration via Thermokon USEapp)		
Output ampere (type-dependent)	TRA 4..20 mA, max. load 500 Ω		
Power supply (type-dependent)	TRV 15..24 V = ($\pm 10\%$) or 24 V ~ ($\pm 10\%$) SELV	TRA 15..24 V = ($\pm 10\%$) SELV	
Power consumption (type-dependent)	max. 2,5 W (24 V =) 4,3 VA (24 V ~)		
Output signal range temp. *Scaling analogue output	TRV TRA default setting: 0..+160 $^{\circ}$ C selectable from 8 temperature ranges -50..+50 -20..+80 -15..+35 -10..+120 0..+50 0..+100 0..+160 0..+250 $^{\circ}$ C, adjustable at the transducer		
Operating temperature range * Max. permissible operating temperature	sensor pocket -50..+160 $^{\circ}$ C	enclosure -20..+70 $^{\circ}$ C	mounting base -35..+90 $^{\circ}$ C
Accuracy temperature	$\pm 0,5$ K (typ. at 21 $^{\circ}$ C within default measuring range)		
Display	LCD 29x35 mm with RGB backlight		
Enclosure	enclosure USE-M, PC, pure white, with removable cable entry, cover PC, transparent		
Protection	enclosure IP65 according to EN 60529	sensor pocket IP65 according to EN 60529, SI-Protection, hex pressed, optional, Rolled: IP67 according to EN 60529 with SI-Protection	
Cable entry	Flextherm M20, for wire $\varnothing=4,5..9$ mm, removable		
Connection electrical	removable plug-in terminal, max. 2,5 mm ²		
Pocket	stainless steel V4A, $\varnothing=4$ mm, mounting length: 50 100 150 mm, tension spring (optional)		
Ambient condition	max. 85% rH short term condensation		
Notes	other cable lengths on request		


» **CONNECTION PLAN**

To change the output voltage range (default 0..10 V to 0..5 V) via jumper, the display must be removed from the board first.


TF14+ LCD TRV MultiRange

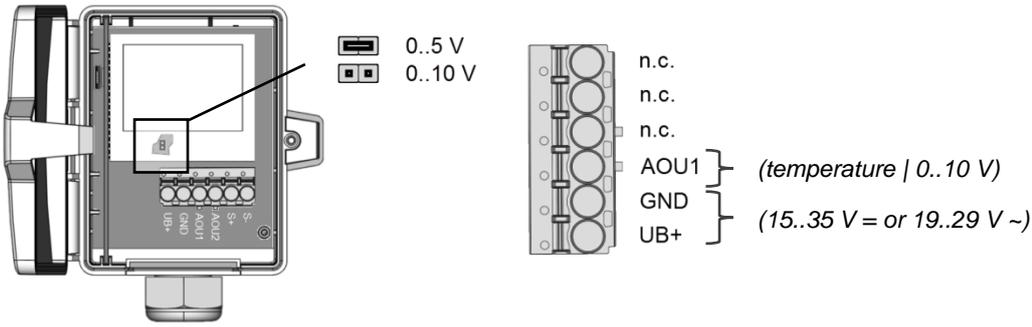

TF14+ LCD TRA MultiRange

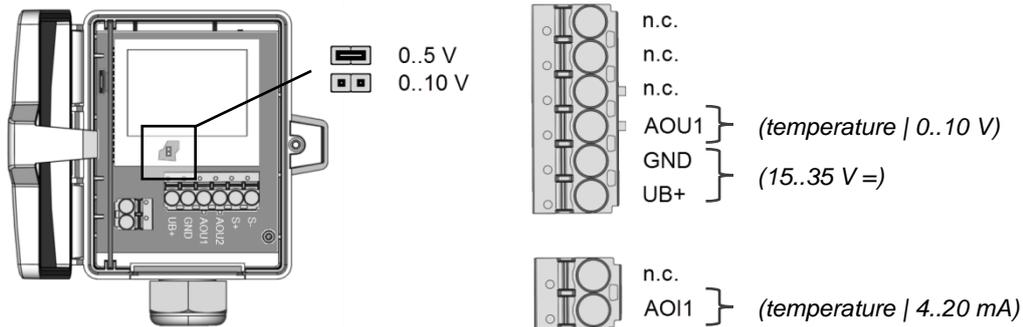

» DIMENSIONS (MM)

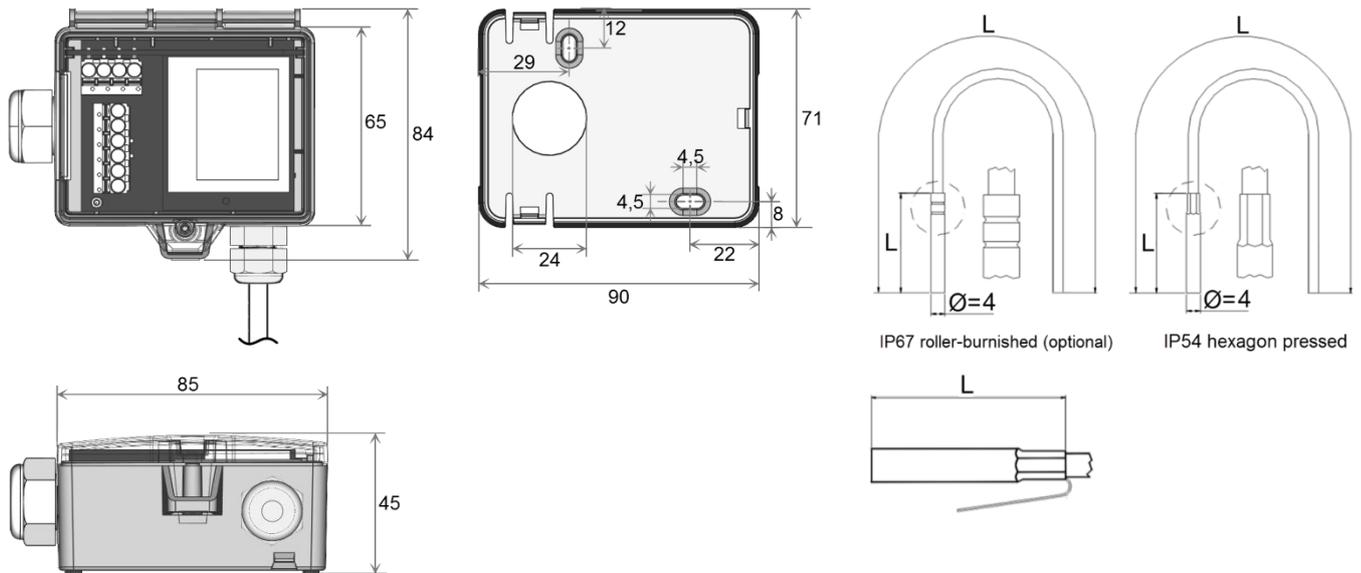

» ACCESSORIES (INCLUDED IN DELIVERY)

Mounting base enclosure USE-M

Mounting kit universal

• Cover screw + screw cover • 2 Rawlplugs • 2 Screws (countersunk head) • 2 Screws (rounded head)

Item No. 631228

Item No. 698511

» ACCESSORIES (OPTIONAL)

Bluetooth-Dongle

VA-Compression fitting type KL4VA

Mounting flange MF6 flexible (suitable for $\varnothing=4$ | 6 | 7 mm)

Mounting flange MF4 (brass)

Syringe thermal contact fluid

Sealing insert M20 USE white, 2x $\varnothing=7$ mm (for 2 wire; PU 10 pieces)

Item-No. 668262

Item No. 103206

Item No. 399098

Item No. 102438

Item No. 102308

Item No. 641333